

-  Clean water
-  Civil use
-  Agricultural use
-  Industrial use



PERFORMANCE RANGE

- Flow rate up to **900 l/min** (54 m³/h)
- Head up to **76 m**

APPLICATION LIMITS

- Manometric suction lift up to **7 m**
- Liquid temperature between **-10 °C** and **+90 °C**
- Ambient temperature between **-10 °C** and **+40 °C**
- Max. working pressure **10 bar**
- Continuous service **S1**

CONSTRUCTION AND SAFETY STANDARDS

EN 60335-1
IEC 60335-1
CEI 61-150

EN 60034-1
IEC 60034-1
CEI 2-3



EU REGULATION N. 547/2012

CERTIFICATIONS

Company with management system certified DNV
ISO 9001: QUALITY



INSTALLATION AND USE

Suitable for use with clean water and with liquids that are not chemically aggressive towards the materials from which the pump is made. As a result of their reliability and the fact that they are easy to use, these pumps are widely used in civil, agricultural and industrial applications such as for supplying water, in air conditioning and cooling systems, for irrigation, etc. Installation needs to be undertaken in well ventilated closed areas or anyway protected from bad weather.

PATENTS - TRADE MARKS - MODELS


- Registered EU Design n. 002098434 for CP 160, CP210, CP250
- Registered Italian model n. 72753 for CP 220, CP 230

OPTIONS AVAILABLE ON REQUEST

- Special mechanical seal
- EN 10088-3 - 1.4401 (AISI 316) stainless steel pump shaft for CP 220, CP 230, CP250
- Other voltages or 60 Hz frequency
- IP X5 class protection for CP 160

PERFORMANCE RANGE


50 Hz n= 2900 min⁻¹ HS= 0 m

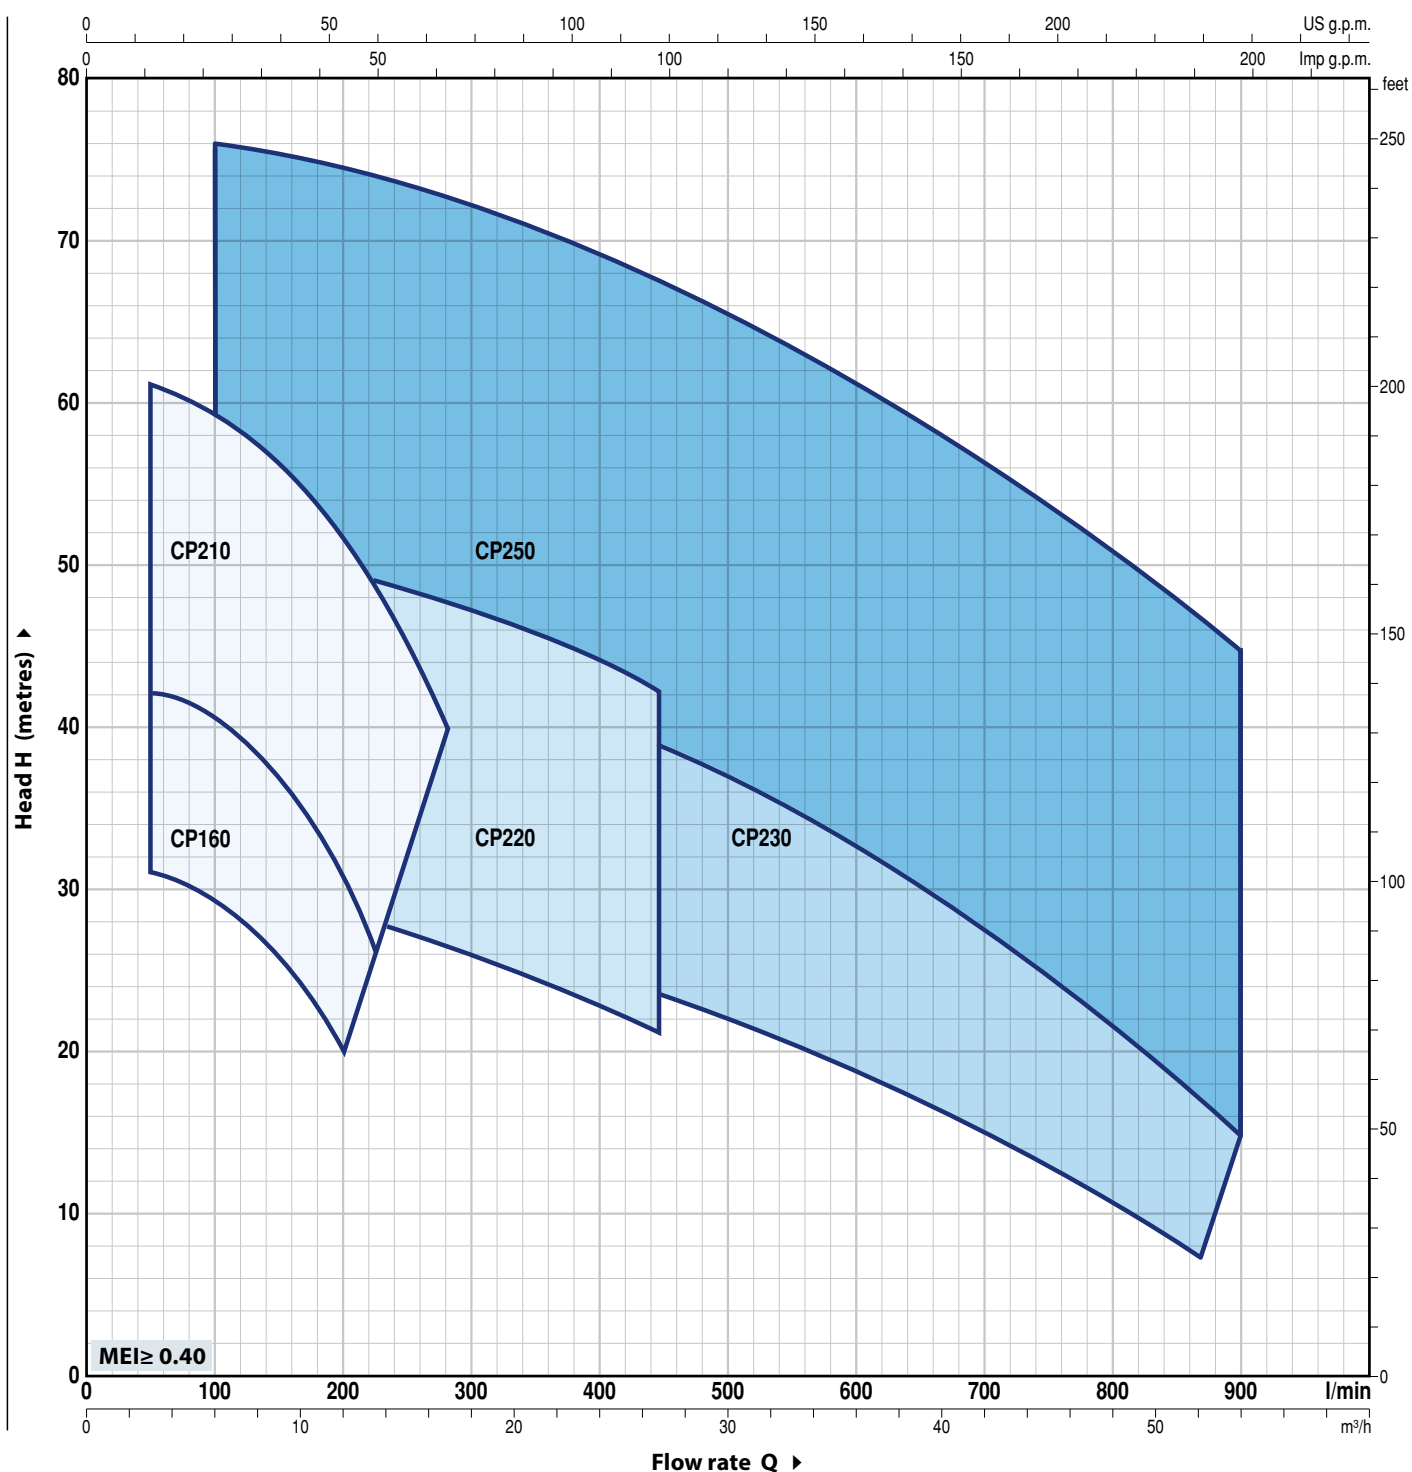

CP 160-210

CHARACTERISTIC CURVES AND PERFORMANCE DATA

50 Hz $n = 2900 \text{ min}^{-1}$ HS = 0 m

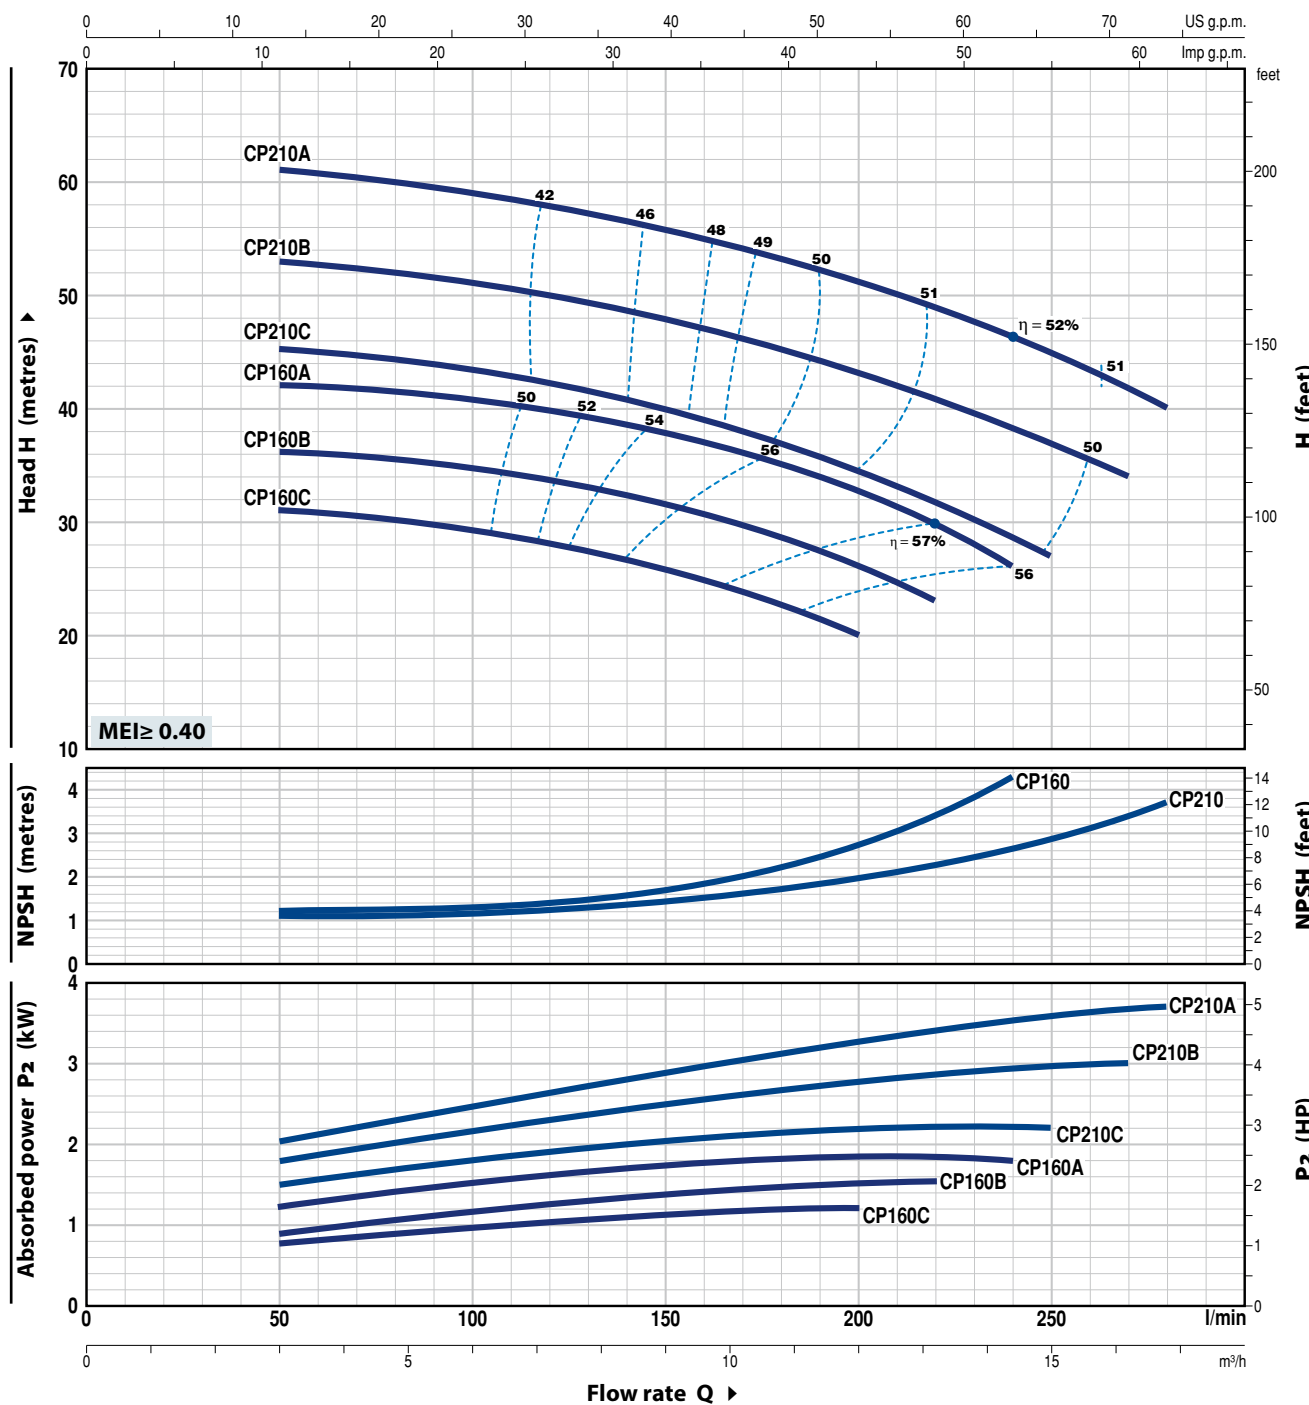

MODEL		POWER (P ₂)			Q	m³/h l/min	0	3	4.5	6	7.5	9	10.5	12	13.2	14.4	15	16.2	16.8
Single-phase	Three-phase	kW	HP	▲			0	50	75	100	125	150	175	200	220	240	250	270	280
CPm 160C	CP 160C	1.1	1.5	IE3	H metres	32	31	30.5	29.5	28	26	23	20						
CPm 160B	CP 160B	1.5	2			37	36	35.5	34.5	33.5	31.5	29	26.5	23					
–	CP 160A	2.2	3			43	42	41.5	40.5	39.5	38	35.5	33	30	26				
CPm 210C	CP 210C	2.2	3			46	45.5	44.5	43.5	42	40	37.5	34.5	32	28.5	27			
–	CP 210B	3	4			54	53	52	51	49.5	48	45.5	43	40	38.5	37	34		
–	CP 210A	4	5.5			61	61	60	59	57.5	56	53.5	51	49	46.5	45	42	40	


Q = Flow rate H = Total manometric head HS = Suction height

Tolerance of characteristic curves in compliance with EN ISO 9906 Grade 3B.

▲ Three-phase motor efficiency class (IEC 60034-30-1)

CHARACTERISTIC CURVES AND PERFORMANCE DATA

50 Hz n = 2900 min⁻¹ HS = 0 m

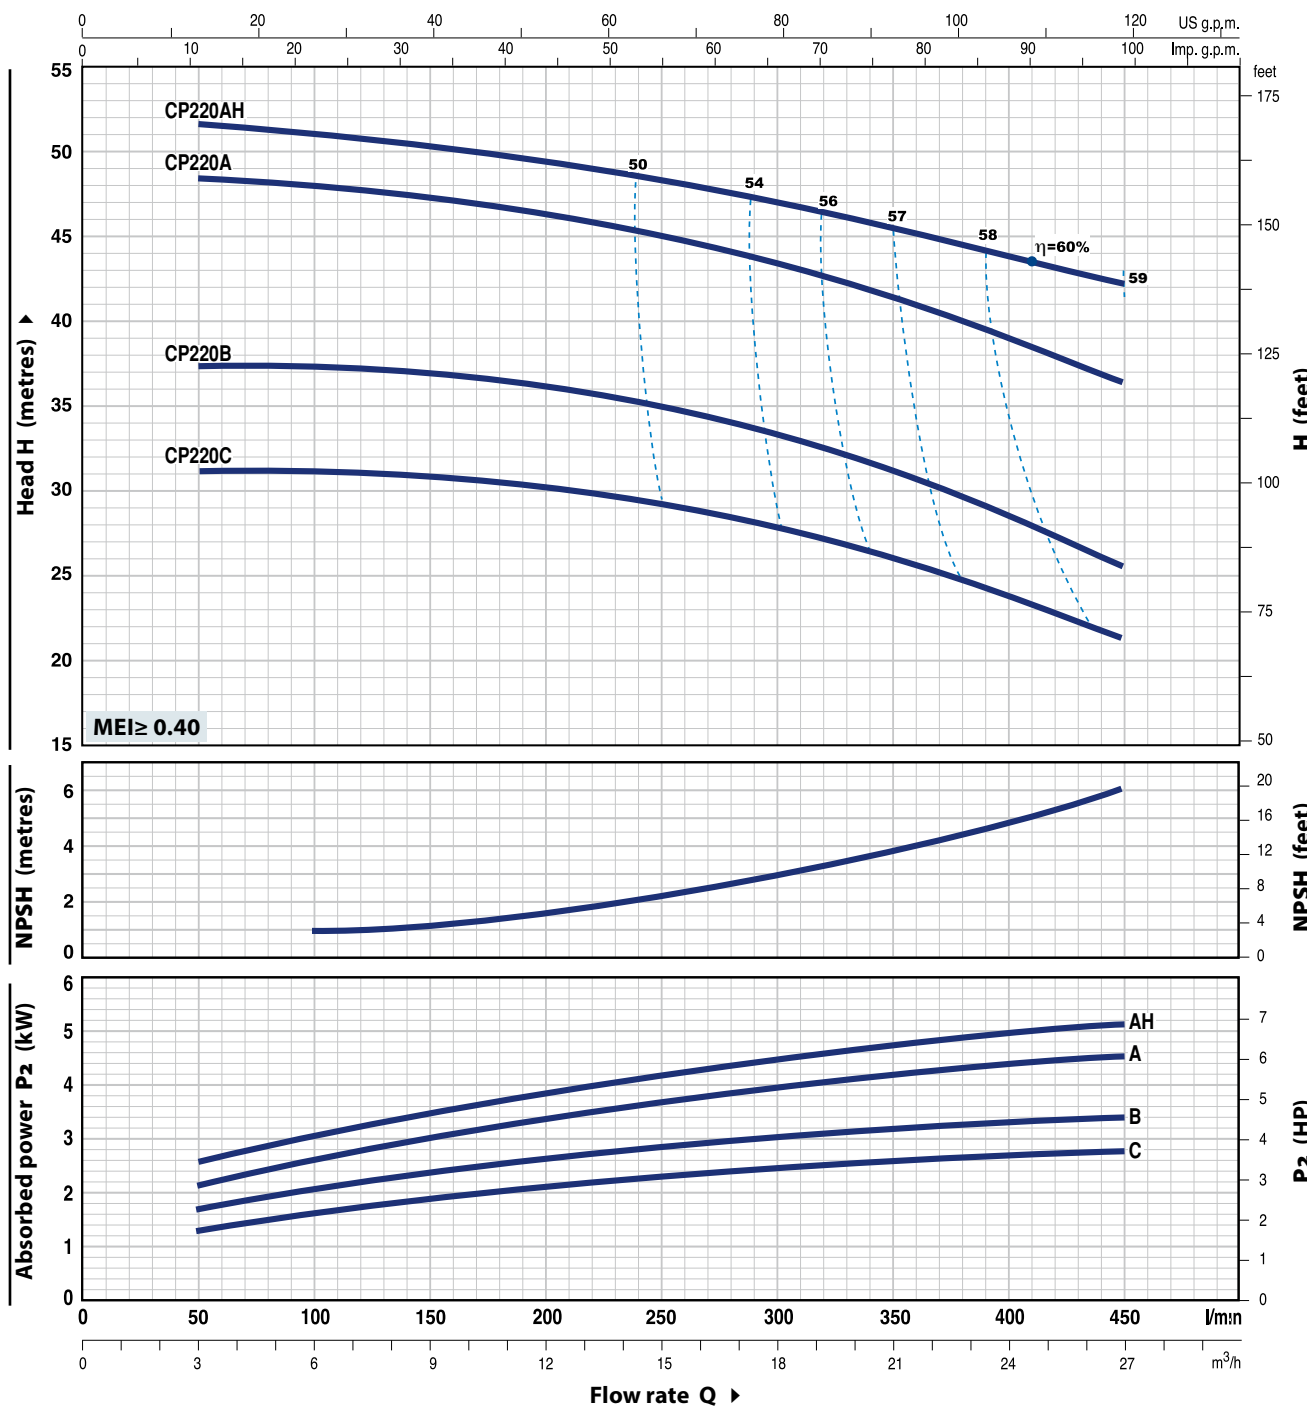

MODEL		POWER (P ₂)		▲	Q	0	3	6	12	18	24	27
Single-phase	Three-phase	kW	HP			0	50	100	200	300	400	450
CPm 220C	CP 220C	2.2	3	IE3	H metres	32	31.5	31	30	28	24	21
-	CP 220B	3	4			38	37.5	37	36	33.5	29	25
-	CP 220A	4	5.5			49	48.5	48	46	43.5	39.5	36
-	CP 220AH	5.5	7.5			52	51.5	51	49	47	44	42

Q = Flow rate H = Total manometric head HS = Suction height


Tolerance of characteristic curves in compliance with EN ISO 9906 Grade 3B.

▲ Three-phase motor efficiency class (IEC 60034-30-1)

CP 230

CHARACTERISTIC CURVES AND PERFORMANCE DATA

50 Hz $n = 2900 \text{ min}^{-1}$ $HS = 0 \text{ m}$

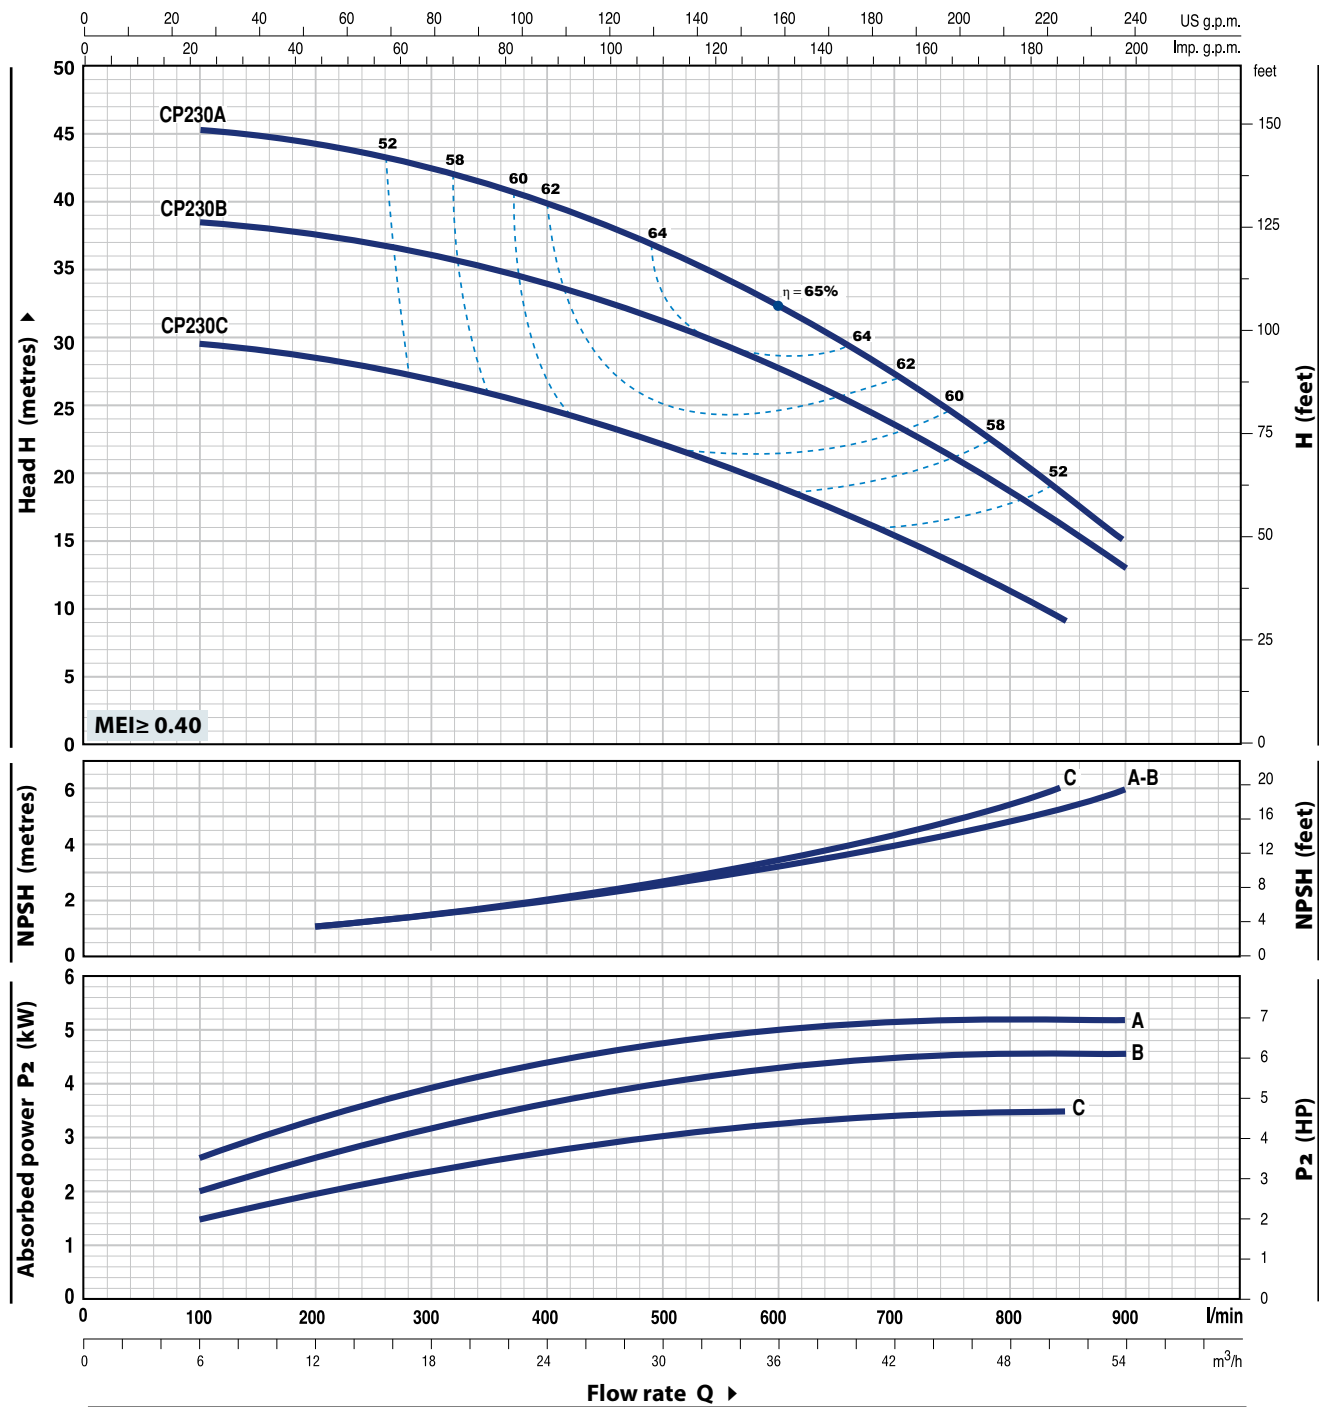


MODEL	POWER (P ₂)		▲	Q	m ³ /h	0	6	12	18	24	30	36	42	48	51	54
	kW	HP				0	100	200	300	400	500	600	700	800	850	900
CP 230C	3	4	IE3	H metres		30	29.5	28.5	27	25	22	19.5	15.5	11.5	9	
CP 230B	4	5.5				39	38.5	38	36	34	31	28	24	18.5	15	13
CP 230A	5.5	7.5				46	45.5	44.5	42	40	37	32.5	27.5	21.5	18	15

Q = Flow rate H = Total manometric head HS = Suction height Tolerance of characteristic curves in compliance with EN ISO 9906 Grade 3B.

▲ Three-phase motor efficiency class (IEC 60034-30-1)

CHARACTERISTIC CURVES AND PERFORMANCE DATA

50 Hz n= 2900 min⁻¹ HS= 0 m

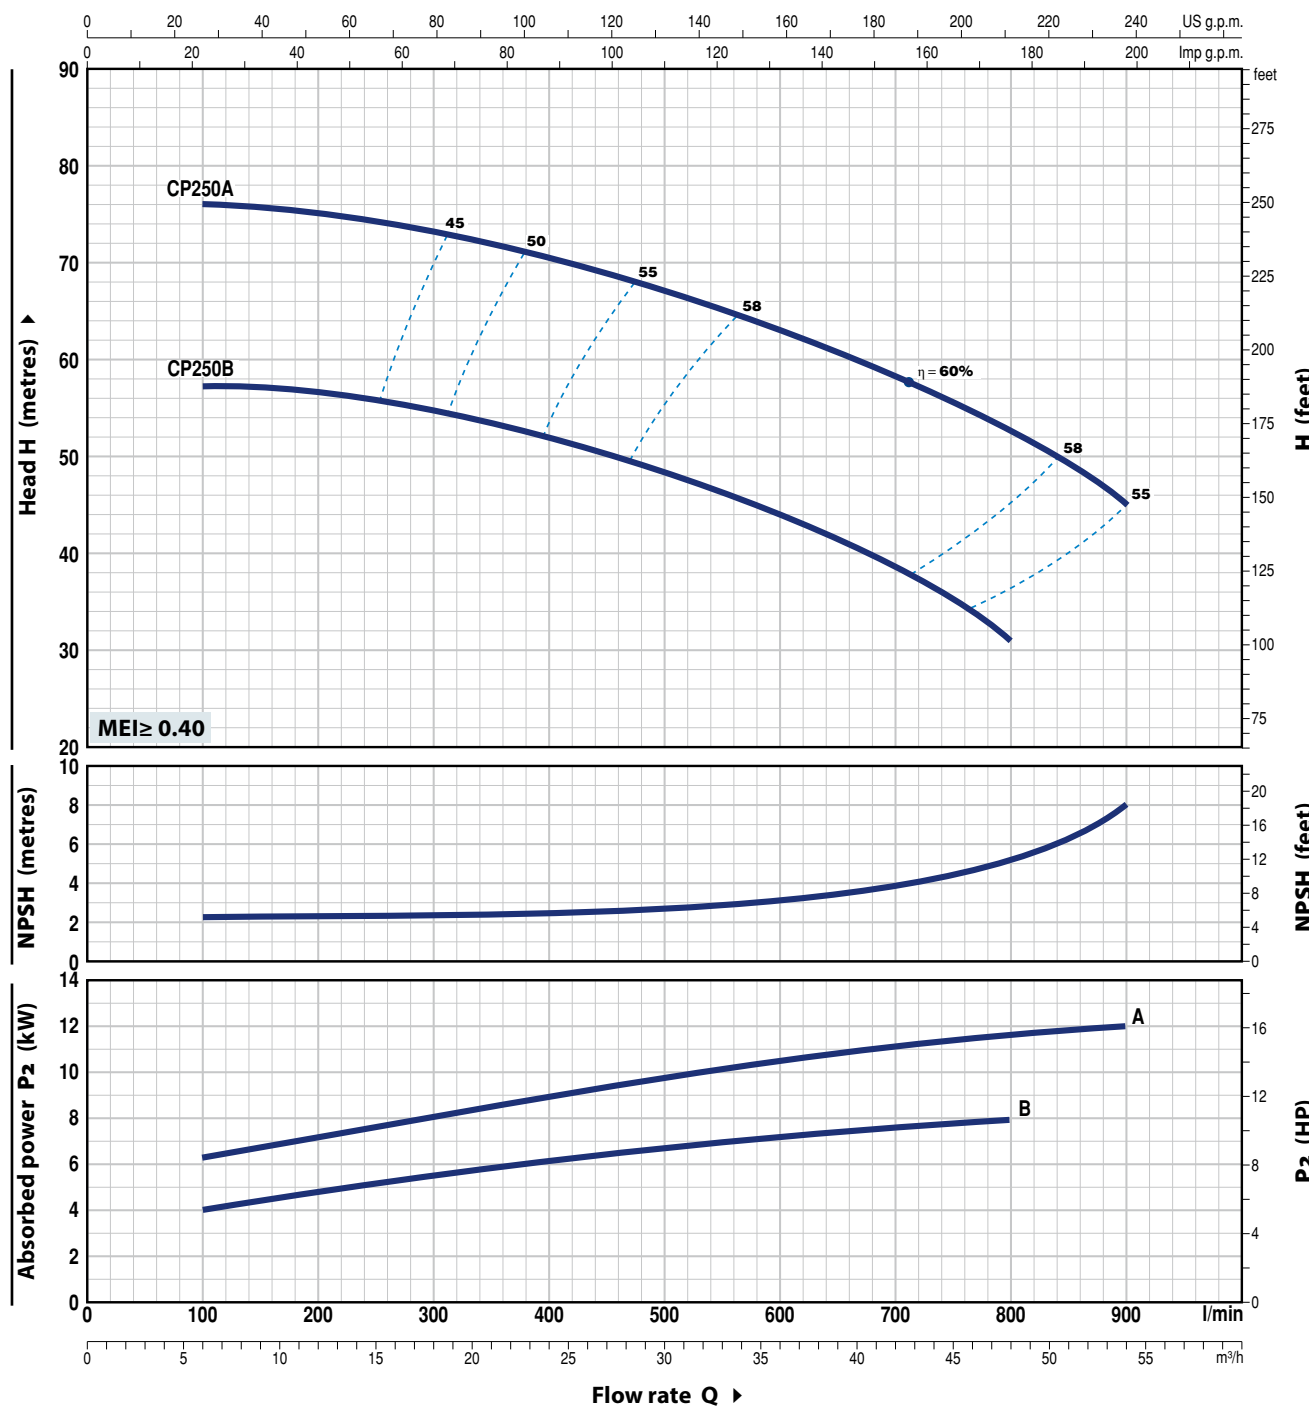

MODEL	POWER (P ₂)			Q	m ³ /h	0	6	12	18	24	30	36	42	48	54
Three-phase	kW	HP	▲		l/min	0	100	200	300	400	500	600	700	800	900
CP 250B	7.5	10	IE3	H metres	57	57.4	56.8	54.8	52	48.4	44.1	38.8	31.3		
CP 250A	11	15			76.1	76	74.9	73.2	70.7	67.3	63	58.1	52.7	45.2	


Q = Flow rate H = Total manometric head HS = Suction height

Tolerance of characteristic curves in compliance with EN ISO 9906 Grade 3B.


▲ Three-phase motor efficiency class (IEC 60034-30-1)

CP 160-210

POS. COMPONENT		CONSTRUCTION CHARACTERISTICS					
1	PUMP BODY	Cast iron complete with threaded ports in compliance with ISO 228/1					
2	BODY BACKPLATE	Cast iron					
3	IMPELLER	Stainless steel for CP160 Brass for CP 210					
4	MOTOR SHAFT	Stainless steel AISI 431					
5	MECHANICAL SEAL	Pump	Seal	Shaft	Materials		
		Model	Model	Diameter	<i>Stationary ring</i>	<i>Rotational ring</i>	<i>Elastomer</i>
		CP 160	FN-18	Ø 18 mm	Graphite	Ceramic	NBR
		CP 210	FN-24	Ø 24 mm	Graphite	Ceramic	NBR
6	BEARINGS	Pump	Model				
		CP 160	6204 ZZ / 6204 ZZ				
		CP 210	6206 ZZ - C3 / 6205 ZZ				
7	CAPACITOR	Pump	Capacitance				
		<i>Single-phase</i>	<i>(230 V or 240 V)</i>		<i>(110 V)</i>		
		CPm 160C	31.5 µF - 450 VL	60 µF - 250 VL			
		CPm 160B	45 µF - 450 VL	80 µF - 250 VL			
		CPm 210C	70 µF - 450 VL	–			
8	ELECTRIC MOTOR	CPm: single-phase 230 V - 50 Hz with thermal overload protector incorporated into the winding (up to 1.5 kW). CP: three-phase 230/400 V - 50 Hz. ➡ The three-phase pumps are fitted with high performance motors in class IE3 (IEC 60034-30-1) – Insulation: class F – Protection: IP X4					

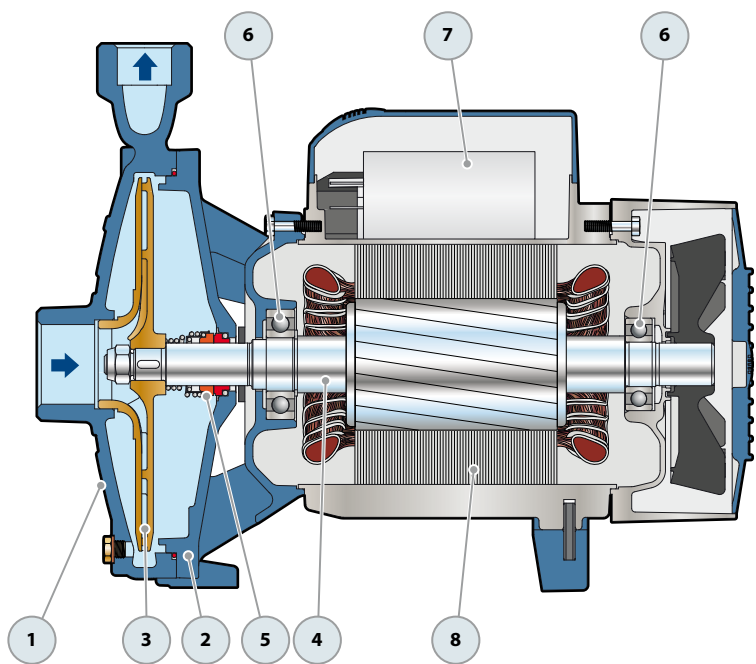

DIMENSIONS AND WEIGHT

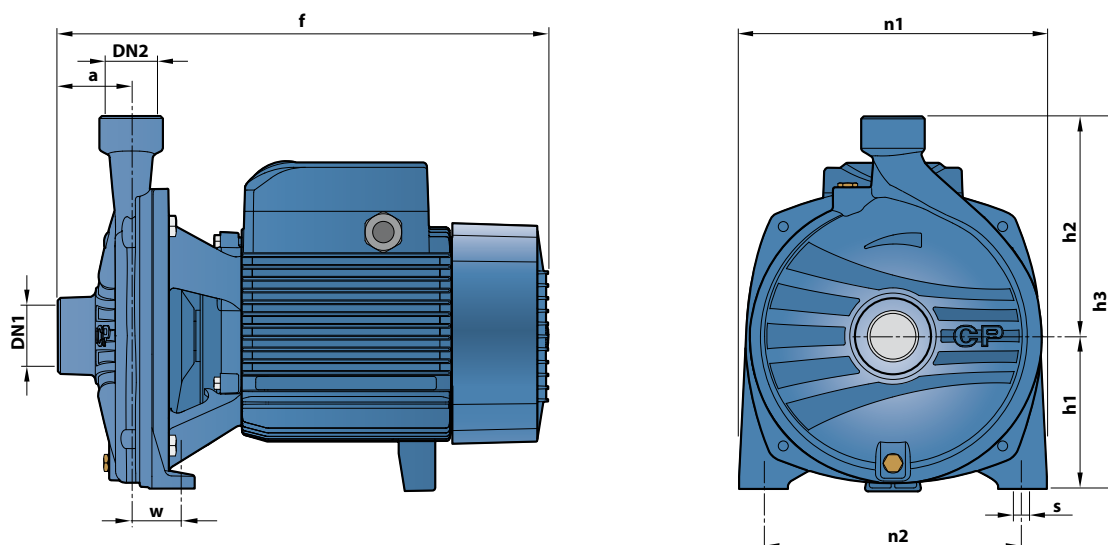

MODEL		PORTS		DIMENSIONS mm									kg	
Single-phase	Three-phase	DN1	DN2	a	f	h1	h2	h3	n1	n2	w	s	1~	3~
CPm 160C	CP 160C	1½"	1"	54	370	110	150	260	206	165	44.5	11	19.3	18.8
CPm 160B	CP 160B				391								20.0	20.5
—	CP 160A												—	23.5
CPm 210C	CP 210C			60	402	125	180	305	252	210	39.5	11	29.0	29.2
—	CP 210B												—	31.0
—	CP 210A												—	31.2

ABSORPTION

MODEL	VOLTAGE		
Single-phase	230 V	240 V	110 V
CPm 160C	8.5 A	8.2 A	17.0 A
CPm 160B	10.3 A	10.0 A	20.6 A
CPm 210C	14.5 A	12.7 A	29.0 A


MODEL	VOLTAGE					
Three-phase	230 V	400 V	690 V	240 V	415 V	720 V
CP 160C	5.7 A	3.3 A	1.9 A	5.5 A	3.2 A	1.8 A
CP 160B	6.9 A	4.0 A	2.3 A	6.7 A	3.8 A	2.2 A
CP 160A	8.9 A	5.1 A	2.9 A	8.3 A	4.8 A	2.8 A
CP 210C	9.2 A	5.3 A	3.1 A	8.8 A	5.1 A	2.9 A
CP 210B	11.2 A	6.5 A	3.8 A	10.8 A	6.2 A	3.6 A
CP 210A	14.8 A	8.5 A	4.9 A	14.2 A	8.2 A	4.7 A

CP 220-230-250


POS. COMPONENT

CONSTRUCTION CHARACTERISTICS

1	PUMP BODY	Cast iron complete with threaded ports in compliance with ISO 228/1					
2	BODY BACKPLATE	Cast iron					
3	IMPELLER	Brass for CP 220, CP 230 Cast iron for CP 250					
4	MOTOR SHAFT	Stainless steel AISI 431					
5	MECHANICAL SEAL	Pump	Seal	Shaft	Materials		
		Model	Model	Diameter	Stationary ring	Rotational ring	Elastomer
		CP 220C-B CP 230C	FN-20	Ø 20 mm	Graphite	Ceramic	NBR
		CP 220A-AH CP 230B-A CP 250B	FN-24	Ø 24 mm	Graphite	Ceramic	NBR
		CP 250A	FN-32 NU	Ø 32 mm	Graphite	Ceramic	NBR
6	BEARINGS	Pump	Model				
		CP 220C	6206 ZZ - C3 / 6204 ZZ				
		CPm 220C					
		CP 220B CP 230C	6206 ZZ - C3 / 6205 ZZ				
		CP 220A-AH CP 230B-A CP 250B	6307 ZZ - C3 / 6206 ZZ - C3				
		CP 250A	6310 ZZ - C3 / 6308 ZZ - C3				
7	CAPACITOR	Pump	Capacitance				
		Single-phase	(230 V or 240 V)				
		CPm 220C	70 µF - 450 VL				
8	ELECTRIC MOTOR	CPm: single-phase 230 V - 50 Hz. CP: three-phase 230/400 V - 50 Hz up to 4 kW. 400/690 V - 50 Hz from 5.5 to 11 kW. ➡ The three-phase pumps are fitted with high performance motors in class IE3 (IEC 60034-30-1) – Insulation: class F – Protection: IP X5					

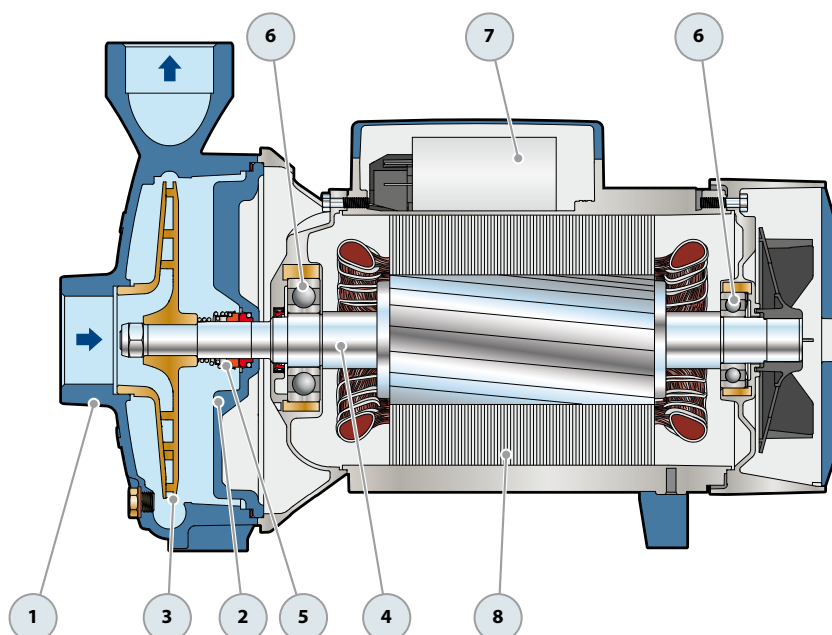

DIMENSIONS AND WEIGHT

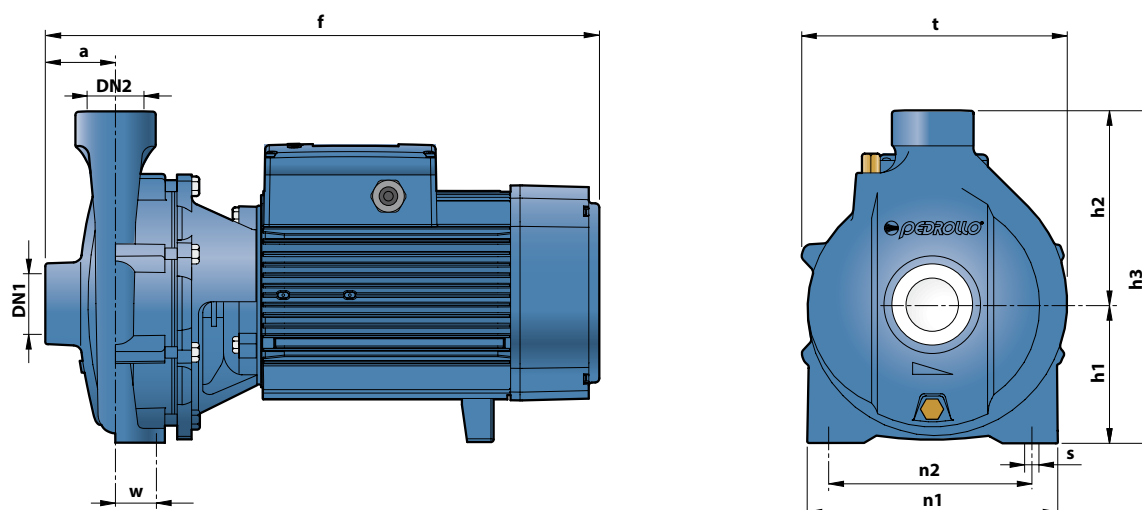

MODEL		PORTS		DIMENSIONS mm										kg	
Single-phase	Three-phase	DN1	DN2	a	f	h1	h2	h3	t	n1	n2	w	s	1~	3~
CPm 220C	CP 220C	2"	2"	70	440/429	132	183	315	243	230	170	40	14	34.1	32.8
—	CP 220B				441									—	36.2
—	CP 220A				459	136	192	328	273	250	190			—	41.0
—	CP 220AH				505									—	47.8
—	CP 230C				440	132	183	315	243	230	170			—	31.9
—	CP 230B				460									—	41.0
—	CP 230A				505	136	192	328	273	250	190			—	46.0
—	CP 250B			65	506							45		—	74.0
—	CP 250A				570	160	232	392	317	294	230			—	103.0

ABSORPTION

MODEL	VOLTAGE	
Single-phase	230 V	240 V
CPm 220C	15.8 A	15.0 A

MODEL	VOLTAGE					
Three-phase	230 V	400 V	690 V	240 V	415 V	720 V
CP 220C	11.4 A	6.6 A	3.8 A	10.7 A	6.2 A	3.6 A
CP 220B	12.6 A	7.3 A	4.2 A	12.0 A	7.0 A	4.0 A
CP 220A	17.0 A	9.8 A	5.7 A	16.5 A	9.5 A	5.5 A
CP 220AH	20.0 A	11.5 A	6.7 A	19.2 A	11.0 A	6.4 A
CP 230C	13.2 A	7.6 A	4.4 A	12.8 A	7.4 A	4.2 A
CP 230B	16.8 A	9.7 A	5.6 A	16.2 A	9.4 A	5.4 A
CP 230A	20.0 A	11.5 A	6.7 A	19.2 A	11.0 A	6.4 A
CP 250B	25.9 A	15.0 A	8.7 A	25.0 A	14.5 A	8.4 A
CP 250A	39.0 A	22.5 A	13.0 A	38.9 A	22.5 A	13.0 A