

GROHE
FLUSHING SYSTEMS













CONTENTS

WC	Flushing Cisterns	853
	Accessories for Flushing Cisterns	857
	WC Flush Valves	867
	Electronic Actuations for WC	873
Urinal	Electronic Actuations for Urinal	877
	Urinal Flush Valves	883





GROHE FLUSHING CISTERNS









GROHE FLUSHING CISTERNS

	Ref. No.	Colour	EAN code	Retail Guide Price (£)	
		37 762 SH0	alpine white	4005176213250	72.41
Flushing cistern for WC for concealed bath furniture installation non-interruptible flush cycle flush button not included min. recommended pressure 0.2 bar ABS flush pipe 180 mm x 320 mm connection from the left/right hand side					
		37 945 SH0	alpine white	4005176256387	72.41
Flushing cistern for WC 6L for concealed bath furniture installation non-interruptible flush cycle flush button not included ABS flush pipe 180 mm x 320 mm min. recommended pressure 0.2 bar connection from bottom left or right					
		37 791 SH0	alpine white	4005176217241	166.85
Flushing cistern for WC 6 l / 3 l exposed installation interruptible flush cycle hidden flush pipe connection servo actuation low level made of PS low noise (group I acc. to German Noise Specification) fully insulated against condensation with isolation valve 1/2" copper pipe mounting template flush pipe bend WC inlet connector					
		38 661 000		4005176294907	164.82
WC concealed cistern factory set 6 l and 3 l pneumatic discharge valve offering 2 modes of operation: dual flush or single flush connection from left/right/back or top Insulated against condensation 1/2" water supply connection including integrated angle valve and push fit flexible hose union inspection shaft for vertical or horizontal use allows for flush plate to be installed vertically or horizontally. flush pipe insulated against condensation fixing brackets for mounting of small flush plates please order revision shaft 40 911 000 (sold separately)					

GROHE FLUSHING CISTERNS

	Ref. No.	Colour	EAN code	Retail Guide Price (£)
	38 987 000		4005176924798	110.62
	<p>WC concealed cistern factory set 6 l and 3 l pneumatic discharge valve offering 2 modes of operation: dual flush or single flush connection from left/right/back or top Insulated against condensation 1/2" water supply connection including integrated angle valve and push fit flexible hose union inspection shaft for vertical or horizontal use allows for flush plate to be installed vertically or horizontally. flush pipe insulated against condensation fixing brackets</p> <p>flush pipe and connector for mounting of small flush plates please order revision shaft 40 911 000 (sold separately)</p>			
	38 863 000		4005176832345	131.62
	<p>Flushing cistern for WC 80 mm 6 l / 3 l pneumatic discharge valve offering 2 modes of operation: dual flush or single flush water supply connection from top with plaster base coating made of vinyl fleece with push fit flexible hose union with isolation valve 1/2" Inspection shaft incl. protection during construction phase, for vertical flush plates only fixing brackets for mounting of small flush plates please order revision shaft 40 949 000 (sold separately)</p>			
	38 422 000		4005176275203	175.88
	<p>Flushing cistern for WC 6 l / 3 l 0.82 m finished installation height front/top actuation water supply from left/right or back Insulated against condensation 415 x 140 x 360 mm fixing brackets without wall plate/actuation GROHE EcoJoy technology for less water and perfect flow</p>			
	38 691 000		4005176815454	175.88
	<p>Eau2 WC Flushing cistern 0.82 m 6 l / 3 l, Dual Flush water supply from left/right or back with angle stop valve 1/2" and flush pipe fixing brackets min. recommended pressure 0.2 bar</p> <p>air button front/top actuation extended hose length for flexibility when positioning the actuation sleek and minimal styling allows the button to be fitted in any 360° orientation GROHE EcoJoy technology for less water and perfect flow</p>			

GROHE FLUSHING CISTERNS




	Ref. No.	Colour	EAN code	Retail Guide Price (£)
	39 053 000		4005176935978	76.31
	Concealed flushing cistern 6 l / 3 l Dual Flush water supply from bottom min. recommended pressure 0.2 bar mechanical round push button actuation Ø 50 mm with Eco button mechanical actuation from front, top, left or right for walls 18 -24 mm thickness bowden cable 0.5 m length for more flexibility in push button position fixing brackets flush pipe WC inlet connector GROHE StarLight chrome finish GROHE EcoJoy technology for less water and perfect flow			
	39 054 000		4005176936289	76.31
	Concealed flushing cistern 6 l / 3 l Dual Flush min. recommended pressure 0.2 bar mechanical round push button actuation Ø 50 mm with Eco button mechanical actuation from front, top, left or right for walls 18 -24 mm thickness bowden cable 0.5 m length for more flexibility in push button position fixing brackets flush pipe WC inlet connector GROHE StarLight chrome finish GROHE EcoJoy technology for less water and perfect flow			
	39 056 000	Chrome	4005176936302	19.94
	Round push button actuation Ø 50 mm with Eco button in combination with bath furniture for combination with flushing cistern 39 053 000 & 39 054 000 for walls 18 -24 mm thickness GROHE StarLight chrome finish			

GROHE ACCESSORIES FOR FLUSHING CISTERNS



GROHE

ACCESSORIES FOR FLUSHING CISTERNS

	Ref. No.	Colour	EAN code	Retail Guide Price (£)
	37 095 000		4005176145124	30.43
	Filling valve 3/8" universal application			
	37 093 000		4005176145070	40.93
	ditto, but with stand pipe for bottom inlet			
	37 092 000		4005176145049	34.84
ditto, with adaptor				
	43 537 000		4005176157653	40.93
	Filling valve for concealed flushing cisterns 6 l			
	42 181 000		4005176286872	40.93
	Filling valve 1/2"			
	42 297 PI0	matt chrome/chrome	4005176832048	65.28
	Eco-discharge valve dual flush discharge valve AV1 push button actuation Ø 40 mm with Eco-knob with fixing device for lid GROHE EcoJoy technology for less water and perfect flow fixing set with 100 mm screws and cellular rubber joint 100 mm dia.			
	42 253 000		4005176814532	61.91
	Dual Flush discharge valve			
	43 907 PI0	matt chrome/chrome	4005176177545	82.90
	Replace kit set for close-coupled ceramic cisterns with filling valve, servo discharge valve interruptible flush cycle fixing set with 100 mm screws and cellular rubber joint 100 mm dia. centring for filling and discharge valve when having larger bore holes GROHE StarLight chrome finish **) max. shortening 100 mm			

GROHE ACCESSORIES FOR FLUSHING CISTERNS

FLUSHING
SYSTEMS

GROHE

ACCESSORIES FOR FLUSHING CISTERNS

	Ref. No.	Colour	EAN code	Retail Guide Price (£)
 	37 099 K00	black	4005176142086	30.74
Flush pipe for low level flushing cistern behind the wall two-parts 180 x 70 mm 300 mm extension including protecting plug				
 	38 735 000		4005176837500	54.19
Dual flush valve set dual flush discharge valve AV1 consisting of valve seat 6l/3l adjustable GROHE EcoJoy technology for less water and perfect flow				
 	38 736 000		4005176837517	43.15
Dual flush valve set for flushing cistern GD 2 / Rapid SL 1.13 m only 6 l / 3 l dual flush discharge valve AV1 consisting of valve seat without wall plate/actuation				
 	42 320 000		4005176837487	61.91
Dual Flush discharge valve AV1 AV1 complete with pipe extension 6 l / 3 l without valve seat without actuation				
 	42 137 000		4005176259524	19.94
Servo discharge valve				
 	43 486 000		4005176157158	51.42
Servo discharge valve 50 pieces per carton				

GROHE

ACCESSORIES FOR FLUSHING CISTERNS

	Ref. No.	Colour	EAN code	Retail Guide Price (£)
 	42 774 000		4005176221590	61.91
Waste pneumatic				
	42 233 000	Chrome	4005176300653	19.94
Connecting hose				
 	43 908 000		4005176160257	19.94
Flush pipe, concealed complete for concealed cisterns with polystyrene insulation and protective cover length 280 mm				
 	37 311 K00	black	4005176160851	19.94
WC inlet and outlet connecting set for wall hung WC connecting pipe 45 mm dia waste sleeve Ø 90 mm 150 mm long 2 chrome finished caps for WC fixing bolts				
 	37 489 000		4005176167386	9.44
Flush pipe extension length 200 mm				
	43 352 000		4005176832413	9.44
Ditto, length 300 mm without connector 37 119 000				
 	37 104 K00	black	4005176160844	19.94
WC inlet and outlet connecting set for wall hung WC connecting pipe 45 mm dia length 200 mm connector 150 mm long				







GROHE

ACCESSORIES FOR FLUSHING CISTERNS

	Ref. No.	Colour	EAN code	Retail Guide Price (£)
 	37 105 K00	black	4005176141904	19.94
Flush pipe extension length 300 mm				
 	37 115 PI0	matt chrome/chrome	4005176172571	9.44
Push button and escutcheon for servo set for close-coupled ceramic cisterns lid hole Ø 40 mm GROHE StarLight chrome finish				
	37 117 PI0	matt chrome/chrome	4005176172588	9.44
Push button and escutcheon for servo set for close-coupled ceramic cisterns lid hole Ø 16 - 35 mm GROHE StarLight chrome finish				
 	37 119 000		4005176144370	4.09
Connector Ø 55 mm				
 	37 125 000	Chrome	4005176144059	6.40
Dummy plug and escutcheon cap for ceramic flushing cisterns lid hole Ø 40 mm GROHE StarLight chrome finish				
 	42 327 000		4005176838705	12.49
PP-outlet bend Ø 90 mm variable depth adjustment				









GROHE

ACCESSORIES FOR FLUSHING CISTERNS

		Ref. No.	Colour	EAN code	Retail Guide Price (£)
 	42 333 000 4.5 l adapter for GD2 to reduce the maximum flush volume to 4.5 liters suitable for all elements with flushing cistern GD 2			4005176845888	14.59
 	42 946 000 Elbow made of PE Ø 80/100 mm			4005176153655	30.17
 	37 131 000 Set for noise protection for WC sound insulation 2 rubber pipes			4005176144585	39.95
	42 773 000 Valve seat for concealed cisterns, DF			4005176221583	15.84
	42 315 000 Valve seat for GD2			4005176835643	11.54
	43 542 000 Valve seat with o-ring valve seat for concealed flushing cisterns 6 - 9 l / 6 l 0.82 m finished installation height (from 02.97) for Variella Compact Ø 41 mm			4005176157714	19.94







GROHE

ACCESSORIES FOR FLUSHING CISTERNS

	Ref. No.	Colour	EAN code	Retail Guide Price (£)
	43 545 000		4005176157745	19.94
	Valve seat with o-ring for concealed flushing cisterns 6 - 9 l / 6 l 0.82 m finished installation height (till 20.97) for Variella Compact Ø 55 mm			
 	43 535 000		4005176157639	3.15
	Push bar 350 mm for Servo discharge valve 350 mm			
 	43 540 000		4005176157691	9.44
	Pop-up rod for Servo discharge valve 451 mm			
	43 544 000		4005176157738	9.44
	Outlet piston			
	43 722 000		4005176158810	11.54
	Set of seals			
	43 734 000		4005176158933	9.44
	Lever			

GROHE

ACCESSORIES FOR FLUSHING CISTERNS

	Ref. No.	Colour	EAN code	Retail Guide Price (£)
	43 735 000		4005176158940	2.41
	Screw cap			
	43 745 000		4005176158995	9.44
	Sealing washer			
	43 770 00M		4005176159244	9.44
	Sealing washer multi-packaging: 10 pieces			
	43 976 000		4005176164781	9.44
	Lever			
	42 242 000		4005176804977	12.59
	4" outlet adaptor for Rapid SL			
	42 075 000		4005176244919	8.34
	Flow restrictor reduces flow rate for exposed flushing cisterns installation in flush pipe shorten if necessary			

GROHE


ACCESSORIES FOR FLUSHING CISTERNS

Ref. No.	Colour	EAN code	Retail Guide Price (£)
42 300 000		4005176832079	30.43



Flow restrictor
reduces flow rate
for flushing cistern GD 2 / Rapid SL 1.13 m only
installation in valve seat
to eliminate water splashes coming out of the bowl

38 714 000	4005176828454	14.59
------------	---------------	-------













WC wall plate extension set 70 mm
with pneumatic discharge valve

GROHE WC FLUSH VALVES












GROHE WC FLUSH VALVES

	Ref. No.	Colour	EAN code	Retail Guide Price (£)
 	37 347 000	Chrome	4005176837999	209.07
Rondo A.S. Flush valve for WC 3/4" brass GROHE StarLight chrome finish for wash-down and wash-out bowls control cap and connection to plastic flush pipe with flow rate adjustment 6 l / 3 l with escutcheon flow pressure min 1.2 bar operating pressure max 5 bar low noise (group I acc. to German Noise Specification)				
 	37 141 000	Chrome	4005176143113	104.54
DAL-Full-automatic flush valve for WC 3/4" brass GROHE StarLight chrome finish for wash-down and wash-out bowls with automatic flow rate flow pressure range from 1.2 - 5.0 bar low noise (group II according to German noise specification)				
 	37 139 000	Chrome	4005176143083	87.38
DAL-Automatic flush valve for WC 3/4" brass GROHE StarLight chrome finish for wash-down and wash-out bowls with flow rate adjustment				
 	37 132 000	Chrome	4005176144608	18.94
Fixing device hidden fixing screws for flush pipes Ø 28 mm for distance to the wall from 15 - 85 mm				
 	37 133 000		4005176144622	31.27
Inlet adaptor for corner installation 3/4"				







GROHE WC FLUSH VALVES

	Ref. No.	Colour	EAN code	Retail Guide Price (£)
 	37 107 000	Chrome	4005176141713	46.07
Flush pipe for WC flush valve Ø 28 x 26 mm 600 x 200 mm brass flush pipe fixing device for distance to the wall from 15 - 85 mm connector				
 	37 112 000		4005176141911	71.51
Flush pipe for flush valves Ø 28 x 26 mm adjustable, 500 - 750 mm brass				
 	37 108 000	Chrome	4005176141720	39.36
Flush pipe for WC flush valve Ø 28 x 26 mm 1000 x 200 mm straight brass without flush pipe fixing device for distance to the wall from 15 - 85 mm connector				
 	37 114 000	Chrome	4005176141935	18.94
Flush pipe extension Ø 28 x 26 mm 260 mm brass				
 	37 135 000		4005176144653	6.04
Connector Ø 55 mm for flush valve to pedestal WC				

GROHE WC FLUSH VALVES

	Ref. No.	Colour	EAN code	Retail Guide Price (£)
	37 153 000		4005176142864	282.29
	<div>  <div> <p>Flush valve for WC concealed installation ¾"</p> <p>stop valve 6 l / 3 l flow pressure range from 1.2 - 5.0 bar with flow rate adjustment box for concealed installation with flush elbow flush pipe adjustable in length without wall plate/actuation low noise (group I acc. to German Noise Specification)</p> </div> </div>			
	37 157 000		4005176142932	269.75
	<div>  <div> <p>Flush valve for WC concealed installation ¾"</p> <p>stop valve 6 - 14 l adjustable for low pressure for wash-down and wash-out bowls flow pressure range from 0.6 - 3.0 bar (min. static pressure 1.5 bar) with flow rate adjustment box for concealed installation with flush elbow flush pipe adjustable in length without wall plate/actuation volume needed: 1.6 l/sec</p> </div> </div>			
	37 048 000		4005176142109	313.77
	<div>  <div> <p>Flush valve for WC concealed installation ¾"</p> <p>with connection to solenoid valve</p> <p>stop valve 6 l / 3 l flow pressure range from 1.2 - 5.0 bar with flow rate adjustment 2 m connecting cable box for concealed installation with flush elbow concealed flush pipe without electronic actuation</p> </div> </div>			
	43 996 000		4005176160424	171.26
	<div>  <div> <p>Flush valve for WC concealed installation ¾"</p> <p>retrofit for 677.00.200/677.03.200/680.00.200 without stop valve without flush pipe</p> </div> </div>			
	43 997 000		4005176160431	169.06
	<div>  <div> <p>Flush valve for WC ¾"</p> <p>retrofit for 677.00.500/677.03.500/680.00.500 for low pressure without stop valve without flush pipe</p> <p>reference: Model 677. with stainless steel actuation is to be replaced by ref. 43 997 and 43 179 P00 (plastic actuation).</p> </div> </div>			





GROHE WC FLUSH VALVES

	Ref. No.	Colour	EAN code	Retail Guide Price (£)
 	42 901 000	Chrome	4005176167027	262.35
Flush valve for WC ¾" concealed installation 6 l / 3 l wall plate Classic, 220 x 255 mm GROHE StarLight chrome finish without stop valve without flush pipe retrofit for 623.03.200 (G¾)				
 	37 102 SH0	alpine white	4005176141768	15.53
Inlet set connecting pipe from flush pipe of concealed flush valve 6 to 9l and concealed flushing cistern to pedestal WC connector escutcheon				
 	37 131 000		4005176144585	39.95
Set for noise protection for WC sound insulation 2 rubber pipes				









GROHE ELECTRONIC ACTUATIONS FOR WC



GROHE ELECTRONIC ACTUATIONS FOR WC





	Ref. No.	Colour	EAN code	Retail Guide Price (£)
	38 698 SD1	stainless steel	4005176929571	695.74
	Tectron Skate Infra-red electronic for WC flushing cistern with infrared sensor for bi-directional communication for monitoring, configuration and servicing with transformer 100-230 V AC, 50-60 Hz, 6 V DC for flushing cistern GD 2 / Rapid SL 1.13 m only servo motor concealed installation front plate 156 x 197 mm infra-red control 7 pre-set programs auto flush cleaning mode pre-flush on/off additional functions and precise settings by remote control 36 407 CE approved			
	38 699 001	Chrome	4005176929588	585.13
	Tectron Surf Infra-red electronic for WC flushing cistern with infrared sensor for bi-directional communication for monitoring, configuration and servicing GROHE StarLight chrome finish with transformer 100-230 V AC, 50-60 Hz, 6 V DC for flushing cistern GD 2 / Rapid SL 1.13 m only servo motor concealed installation front plate 156 x 197 mm infra-red control 7 pre-set programs auto flush cleaning mode pre-flush on/off additional functions and precise settings by remote control 36 407 adjustable flush (3 - 9 l) by hand or remote CE approved			
	37 419 000	Chrome	4005176933806	784.24
	37 419 SD0	stainless steel	4005176933813	784.24
	38 393 SD1	stainless steel	4005176929564	460.80
	Tectron Skate Infra-red electronic for WC flush valve with transformer 100-230 V AC, 50-60 Hz, 6 V DC concealed installation front plate 156 x 197 mm infra-red control solenoid valve 7 pre-set programs CE approved			

GROHE ELECTRONIC ACTUATIONS FOR WC

	Ref. No.	Colour	EAN code	Retail Guide Price (£)
 	43 617 000		4005176841163	72.41
Motor support device for Rapid SL 38 675 for the disabled as of mid 2008 or installation of infra-red electronic				
 	38 778 000		4005176855269	665.33
Radio transmitter for an additional flush plate for manual actuation for WC receiver modul 868,4 MHz for support rails for the disabled with radio transmitter of Hewi, Keuco, Lehenen, Normbau, Pressalit, AMS, Deubad, Erlau, FRELU, FSB for flushing cistern GD 2 / Rapid SL 1.13 m only for flushing cistern 6 l concealed installation servo motor with transformer 100-230 V AC, 50-60 Hz, 6 V DC adjustable flush volume adjustable flow time 72 h flushing can be activated with extension cable, 3.00 m length, for connecting transformer and electronic				
 	36 340 000		4005176911385	54.21
Power extension cable length 3.00 m				
 	36 341 000		4005176911392	97.46
Power extension cable length 10.00 m				

GROHE

ELECTRONIC ACTUATIONS FOR WC

	Ref. No.	Colour	EAN code	Retail Guide Price (£)
 	43 977 000	Chrome	4005176164798	208.83
	Air button GROHE StarLight chrome finish remote hand -actuation for institutional requirements white push button with escutcheon Ø 100 mm for walls of 80 - 240 mm thickness actuation stop pneumatic hose 1500 mm long			
 	36 407 001		4005176368974	261.30
	Remote control for all GROHE one eye infra-red products as of 06/2015 and GROHE Blue Home until 12/2018 monitoring consumption and usage data thermal disinfection cycles (infrared mixers) auto flush cycles (infrared mixers) cleaning mode cycles (GROHE Blue Home) filter and CO ₂ capacity (GROHE Blue Home) configuration cleaning mode activation thermal disinfection (infrared mixers) detection range (infrared mixers) shut off delay (infrared mixers) auto flush (infrared mixers) filter capacity (GROHE Blue Home) service send and save profile reset to factory or user settings service details demo mode error codes (GROHE Blue Home) 3 x 1.5 V DC (AAA) battery supply			


GROHE ELECTRONIC ACTUATIONS FOR URINAL



GROHE







ELECTRONIC ACTUATIONS FOR URINAL

Ref. No.	Colour	EAN code	Retail Guide Price (£)
37 421 000	Chrome	4005176935572	424.00











Tectron Rondo
Infra-red electronic for Urinal
with infrared sensor for bi-directional communication
for monitoring, configuration and servicing
6V lithium battery, type CR-P2
battery lifetime approx. 7 years (150 actuations a day)
metal housing
exposed installation
flow pressure min 0.5 bar
operating pressure max 10 bar
G 1/2
with **integrated stop valve**
flush pipe with rubber connector
multistage battery status display
7 pre-set programs
auto flush
cleaning mode
pre-flush on/off
additional functions and precise settings
by remote control 36 407
adjustable flow time by hand or remote
CE approved







GROHE ELECTRONIC ACTUATIONS FOR URINAL

	Ref. No.	Colour	EAN code	Retail Guide Price (£)
 	37 336 001	Chrome	4005176929540	518.76
	Tectron Surf Infra-red electronic for Urinal with infrared sensor for bi-directional communication for monitoring, configuration and servicing with transformer 100-230 V AC, 50-60 Hz, 6 V DC cartridge with solenoid valve and dirt strainer front plate 116 x 144 mm flow pressure min 0.5 bar operating pressure max 10 bar infra-red control 7 pre-set programs auto flush cleaning mode pre-flush on/off additional functions and precise settings by remote control 36 407 adjustable flow time by hand or remote compatible with for Rapido U CE approved			
 	37 337 001	Chrome	4005176929557	488.89
	Tectron Surf Infra-red electronic for Urinal with infrared sensor for bi-directional communication for monitoring, configuration and servicing 6V lithium battery, type CR-P2 battery lifetime approx. 7 years (150 actuations a day) cartridge with solenoid valve and dirt strainer front plate 116 x 144 mm flow pressure min 0.5 bar operating pressure max 10 bar infra-red control multistage battery status display 7 pre-set programs auto flush cleaning mode pre-flush on/off additional functions and precise settings by remote control 36 407 adjustable flow time by hand or remote compatible with Rapido U or Rapido UMB CE approved			
 	37 321 001	Chrome	4005176929496	518.76
	37 321 SD1	stainless steel	4005176929502	518.76
	Tectron Skate Infra-red electronic for Urinal with infrared sensor for bi-directional communication for monitoring, configuration and servicing with transformer 100-230 V AC, 50-60 Hz, 6 V DC cartridge with solenoid valve and dirt strainer front plate 116 x 144 mm flow pressure min 0.5 bar operating pressure max 10 bar 7 pre-set programs auto flush cleaning mode pre-flush on/off additional functions and precise settings by remote control 36 407 adjustable flow time by hand or remote compatible with for Rapido U CE approved			

GROHE ELECTRONIC ACTUATIONS FOR URINAL

	Ref. No.	Colour	EAN code	Retail Guide Price (£)
	37 324 001	Chrome	4005176929526	518.76
	37 324 SD1	stainless steel	4005176929533	488.89
 <p>Tectron Skate Infra-red electronic for Urinal with infrared sensor for bi-directional communication for monitoring, configuration and servicing 6V lithium battery, type CR-P2 battery lifetime approx. 7 years (150 actuations a day) cartridge with solenoid valve and dirt strainer front plate 116 x 144 mm flow pressure min 0.5 bar operating pressure max 10 bar multistage battery status display 7 pre-set programs auto flush cleaning mode pre-flush on/off additional functions and precise settings by remote control 36 407 adjustable flow time by hand or remote compatible with Rapido U or Rapido UMB CE approved</p>				
	37 338 000		4005176837920	131.61
	 <p>GROHE Rapido U roughing-in set for urinal for manual actuation or Tectron infra-red electronic 6 V or 230 V water group with stop valve flow pressure min 0.5 bar operating pressure max 10 bar flush aid functional unit checked ex factory water supply connections 1/2" outer thread connecting box for mains supply installation box with gasket fixing points for dry cladding and masonry-in inspection shaft incl. protection</p>			
	38 787 000		4005176855689	109.51
	 <p>GROHE Rapido UMB roughing-in set for urinal for manual actuation or Tectron infra-red electronic 6 V water group with stop valve flow pressure min 0.5 bar operating pressure max 10 bar flush aid functional unit checked ex factory water supply connections 1/2" outer thread installation box with gasket fixing points for dry cladding and masonry-in inspection shaft incl. protection during construction phase</p>			
	36 407 001		4005176368974	261.30
	 <p>Remote control for all GROHE one eye infra-red products as of 06/2015 and GROHE Blue Home until 12/2018 monitoring consumption and usage data thermal disinfection cycles (infrared mixers) auto flush cycles (infrared mixers) cleaning mode cycles (GROHE Blue Home) filter and CO₂ capacity (GROHE Blue Home) configuration cleaning mode activation thermal disinfection (infrared mixers) detection range (infrared mixers) shut off delay (infrared mixers) auto flush (infrared mixers) filter capacity (GROHE Blue Home) service send and save profile reset to factory or user settings service details demo mode error codes (GROHE Blue Home) 3 x 1.5 V DC (AAA) battery supply</p>			

GROHE ELECTRONIC ACTUATIONS FOR URINAL

	Ref. No.	Colour	EAN code	Retail Guide Price (£)
	39 368 000		4005176341540	514.90
	Temperature sensor for urinal with transformer 100-240 V AC, 50-60 Hz, 6.75 V DC 39 376 000 Rapid SL required Waste trap with temperature sensor cartridge with solenoid valve and dirt strainer flow pressure min 0.5 bar operating pressure max 10 bar 7 pre-set programs auto flush cleaning mode pre-flush on/off CE approved			
	39 367 000		4005176341533	514.90
	Temperature sensor for urinal 6V lithium battery, type CR-P2 with water connection set and stop valve Waste trap with temperature sensor cartridge with solenoid valve and dirt strainer flow pressure min 0.5 bar operating pressure max 10 bar 7 pre-set programs auto flush cleaning mode pre-flush on/off CE approved only for certain urinal ceramics, check online TPI			
	39 369 000		4005176341557	685.07
	Temperature sensor with Bluetooth for urinal with transformer 100-240 V AC, 50-60 Hz, 6.75 V DC 39 376 000 Rapid SL required Waste trap with temperature sensor cartridge with solenoid valve and dirt strainer flow pressure min 0.5 bar operating pressure max 10 bar with Bluetooth module for bi-directional communication for monitoring, configuration and service purpose with Bluetooth 4.0* for wireless data communication Bluetooth transmitter frequency: 2.4 GHz Bluetooth range (max. 10 m) varies depending on materials used and walls between transmitter and receiver for Apple** and Android devices monitoring password protected products app detects all Bluetooth products in range auto flush cycles and timing last auto flush usage per day over 30 days configuration shut-off delay auto flush cleaning mode 2 on/off timers identification by name service send and save 3 profiles reset to factory or user settings hard and software version CE approved			

Mobile devices and GROHE IR Remote App*** are not included in delivery and have to be ordered separately via an authorised Apple store/store/iTunes or Google Play store.

* The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Grohe AG is under license. Other trademarks and trade names are those of their respective owners.

** Apple, the Apple logo, iPod, iPod Touch, iPhone and iTunes are trademarks of Apple Inc., registered in the U.S. and other countries. Apple is not responsible for the function of this device or its compliance with safety and regulatory standards

*** Available for free via iTunes app or Google Play store.

GROHE URINAL FLUSH VALVES





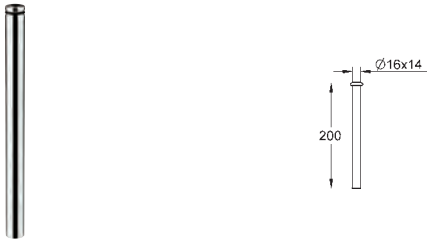

GROHE

URINAL FLUSH VALVES

	Ref. No.	Colour	EAN code	Retail Guide Price (£)
 	37 339 000	Chrome	4005176837937	109.49
Rondo Flush valve for urinal 1/2" brass integrated stop valve GROHE StarLight chrome finish with control cap and flush pipe connection flow rate adjustment flush volume adjustable 1.0 - 4.0 l with wall escutcheon flush pipe 200 mm rubber connector with escutcheon flow pressure min 0.5 bar operating pressure max 5 bar				
 	37 396 000	Chrome	4005176907968	120.57
Press urinal flush valve 1/2" brass GROHE StarLight chrome finish with wall escutcheon				
 	37 044 000		4005176160776	19.94
Urinal inlet connector, 1/2"				
 	37 035 000	Chrome	4005176143731	12.38
Urinal flush pipe Ø 18 mm 200 mm brass chrome plated straight				
 	37 036 000	Chrome	4005176143748	19.52
Urinal flush pipe Ø 18 mm 200 mm brass chrome plated offset 10 mm				
 	37 037 000	Chrome	4005176143762	21.57
Offset 20 mm				
 	37 038 000	Chrome	4005176143786	23.62
Urinal flush pipe Ø 18 mm 200 mm brass chrome plated offset 30 mm				
 	37 039 000	Chrome	4005176143793	25.65
ditto, offset 40 mm				

GROHE

URINAL FLUSH VALVES

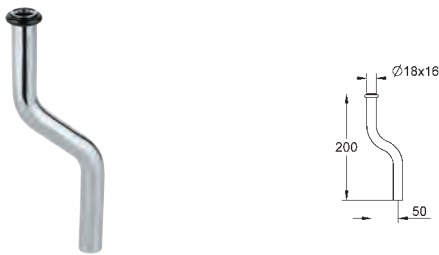	Ref. No.	Colour	EAN code	Retail Guide Price (£)
	37 040 000	Chrome	4005176143861	28.65
Urinal flush pipe Ø 18 mm 200 mm brass chrome plated offset 50 mm				
	37 043 000	Chrome	4005176143922	38.57
Urinal flush pipe Ø 18 mm 400 mm brass straight				
	37 042 000	Chrome	4005176143908	17.42
Flush pipe extension Ø 16 mm 200 mm brass				
	43 818 000	Chrome	4005176159589	12.59
Adapter for urinal with inlet pipe 1 1/2" GROHE StarLight chrome finish				